

Advanced Call Manager Version 1.04

USER MANUAL

The information contained in this guide is correct as of the time of its publishing (April 2004). WebGate reserves the right to make changes to the user guide and services described therein. Nokia is a trademark of Nokia Corporation.



TABLE OF CONTENT

Starting Advanced Call Manager.....	3
Main Menu.....	4
Preferences.....	5
Active Mode.....	6
Default Rejected Calls Action.....	8
Black/White Lists.....	9
SMS Templates.....	12
Voice Greetings.....	14
Voice Messages.....	15
User scenarios.....	16

Starting Advanced Call Manager





When Advanced Call Manager is active you will see on your phone's status line the following indicator icon:




If Advanced Call Manager is not running, you can start it from the applications menu.


Main Menu

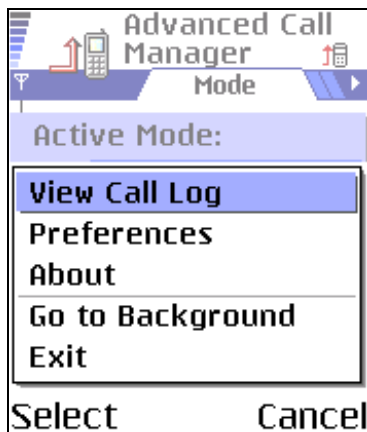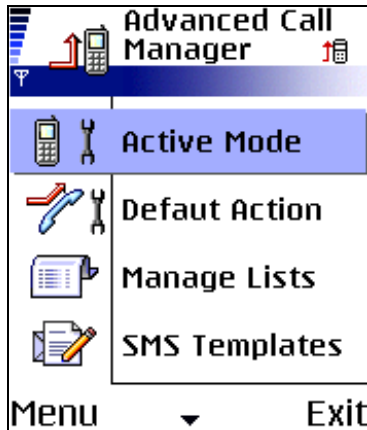

- **View Call Log**
Shows the phone call log.
- **Preferences**
Edit the application options and preferences.
- **About**
Shows short information about the product and the author.
- **Go to Background**
Switch the application to the background.
- **Exit**
Exits the application. Use "Go to Background" option if you want Advanced Call Manager to catch the calls in the background.

Preferences

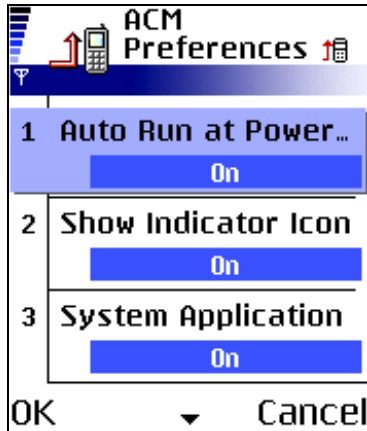



- **Auto Run at Power-on**
This option allows the user to activate/deactivate Advanced Call Manager auto run, when the phone is starting. By default this option is turned "On".
- **Show indicator icon**
This option allows the user to activate/deactivate indicator icon  on the status bar. By default this option is turned "On".
- **System application**
Makes Advanced Call Manager a Symbian OS system application. This will ensure that it does not get closed down by the Symbian OS low memory framework or by the backup framework. By default this option is turned "On".

Note: If you attempt to backup your device using PC Suite, it will find the application is locked. To backup Advanced Call Manager, exit before starting a backup.

- **Voice message time**
Defines the maximum voice message length. By default this option is set to 60 seconds.
- **Listen on Voice line**
Specify that the application will take control of voice line calls. By default this option is turned "On".
- **Listen on Data line**
Specify that the application will take control of data line calls. By default this option is turned "Off".
- **Listen on Fax line**
Specify that the application will take control of fax line calls. By default this option is turned "Off".




Active Mode

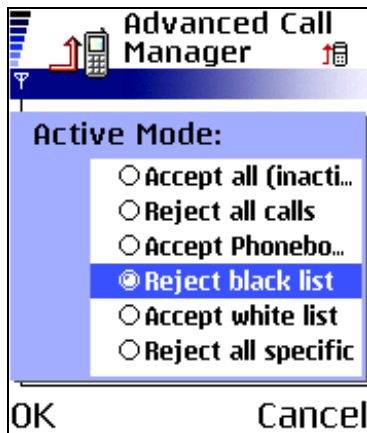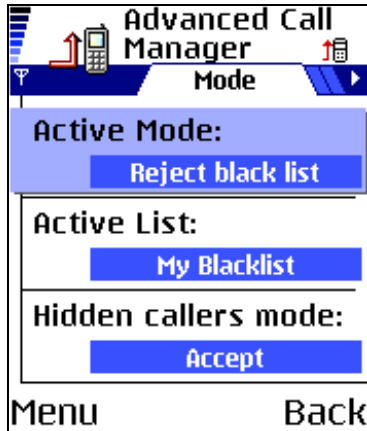

There are 2 choice lists, which define your phone's behavior. The first one allows you to choose the current general active mode:

- **Accept all calls (inactive)**
The phone will accept all incoming calls.
- **Reject all calls**
The phone will reject all incoming calls. The action for the rejected calls is the default action defined in the "Action" page, which is discussed below.
- **Accept Phonebook**
The phone will accept incoming calls only from people listed in the Phonebook. The action for the rejected calls is the default action defined in the "Action" page, which is discussed below. If the Phonebook is changed, while Advanced Call Manager is running and the active mode is "Accept Phonebook", you will have to reselect "Accept Phonebook" from "Mode" page in order to reload the changed Phonebook.
- **Reject black list**
The phone will reject incoming calls from people listed in user defined "Black List". The action for the rejected calls is the custom action defined for the current blacklisted person. If you have set to reject "Hidden callers" in this mode, then the default action defined in the "Action" page is used for them.
- **Accept white list**
The phone will accept incoming calls only from people listed in user defined "White List". The action for the rejected calls is the default action defined in the "Action" page, which is discussed below.
- **Reject all specific**
The phone will reject all incoming calls. The action for the rejected calls is the custom action defined for the current person. If you have set to reject "Hidden callers" in this mode, then the default action defined in the "Action" page is used for them.




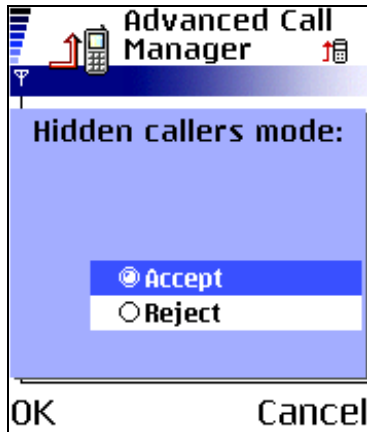

The second choice list allows you to define your phone's behavior in regard to the "hidden callers". Hidden callers are all callers, whose phone number can't be retrieved. For example people with activated CLIR service.


- **Reject hidden callers**
The phone will reject incoming calls from the "hidden callers".
- **Accept hidden callers**
The phone will accept incoming calls from the "hidden callers".

Default Rejected Calls Action

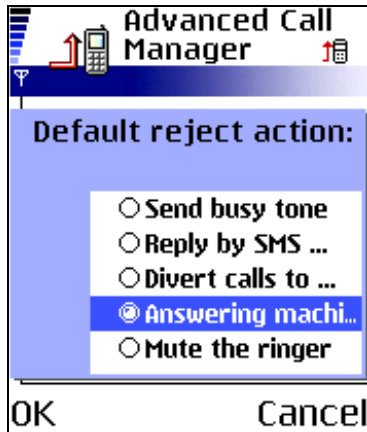


Here you can define the default action for the rejected incoming calls. It will be used, when your mode is "Reject all", "Accept Phonebook" or "Accept White list" or rejecting "Hidden" callers in any mode.


- **Send busy tone**
The phone will hang-up the incoming call without any additional action.
- **Reply by SMS**
The phone will hang-up the incoming call and will send user defined SMS to the caller.
- **Divert calls to ...**
The phone diverts incoming call to the user defined number. This option activates "Divert When Busy" mobile operator service.
- **Answering machine**
The phone will answer the call, play user defined greeting to the telephony uplink and record caller's voice message from the telephony downlink.
- **Mute the ringer**
The phone will mute the ringer.

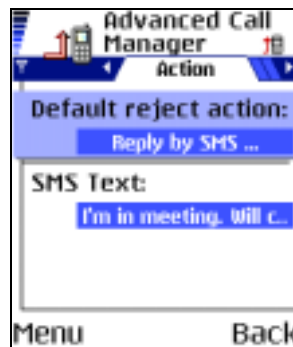

"Reply by SMS" Screen


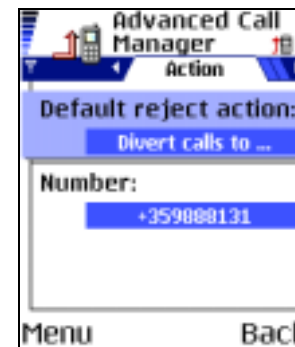


"Divert Calls to" Screen

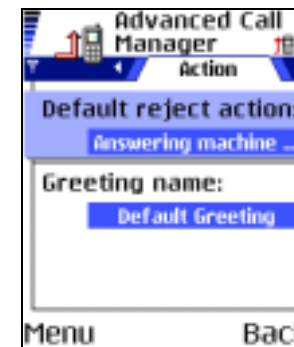


"Answering machine" Screen

Black/White Lists

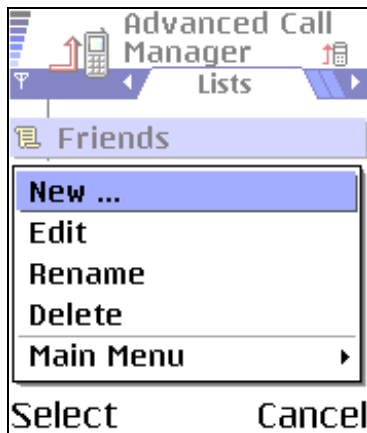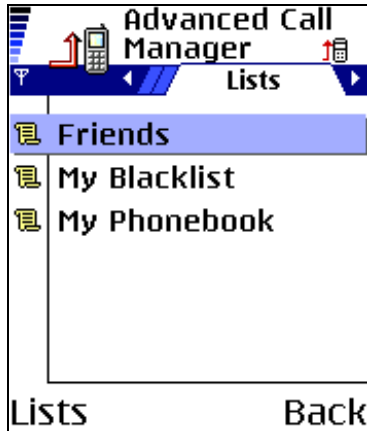


Here you can create a new list or edit, rename and delete an existing list, which can be used together with "Reject from black list", "Accept from white list", "Reject all specific" active modes.

- **New**
Starts the creation of new list.
- **Edit**
Starts editing an existing list.
- **Rename**
Renames an existing list.
- **Delete**
Deletes an existing list. You can't delete a list if it is currently in use by the application.

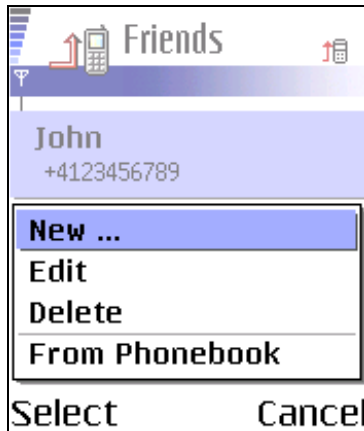

Once created the list can be edited. If the list is currently in use by the application, the changes are updated real time.


- **New**
Starts the creation of a new list entry.
- **Edit**
Starts editing an existing list entry.
- **Delete**
Deletes an existing list entry.
- **From Phonebook**
Allow you to import list entry data from the Phonebook.

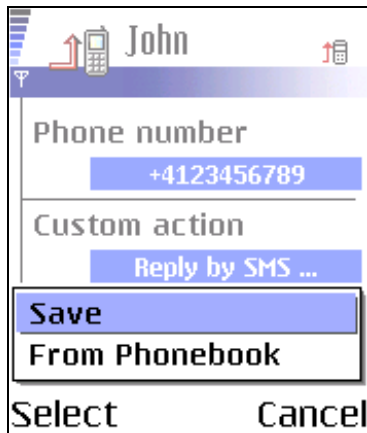Every list entry has 4 fields – name of the person, the phone number, custom action (if rejected) and custom SMS text (if custom action is set to “Reply by SMS”)/custom Greeting (if custom action is set to “Answering machine”).


- **Save**
Saves the changes of the new/edited list entry. Phone number is required field for this operation.
- **From Phonebook**
Allow you to import list entry data from the Phonebook.
- **Cancel**
Cancels the creation/editing of the list entry.

SMS Templates

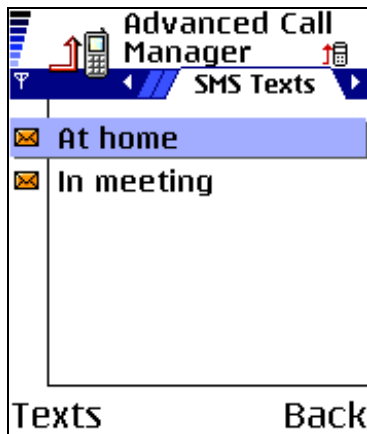

Here you can create a new SMS template or edit, rename and delete an existing SMS template, which can be used for both default and custom "Reply by SMS" action.


- **New**
Starts the creation of a new SMS template.
- **Edit**
Starts editing an existing SMS template.
- **Rename**
Renames an existing SMS template.
- **Delete**
Deletes an existing SMS template

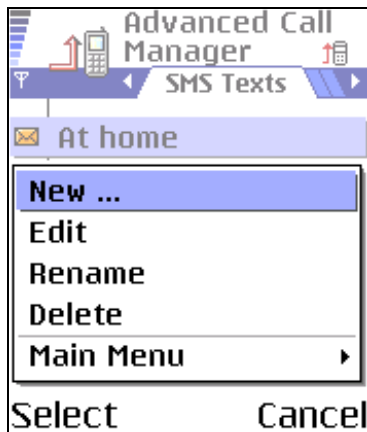




Once created the SMS template can be edited.

- **Save**
Saves the changes of the new/edited SMS template.
- **Import**
Imports the SMS template text from existing SMS templates.
- **Cancel**
Cancels the creation/editing of the SMS template.

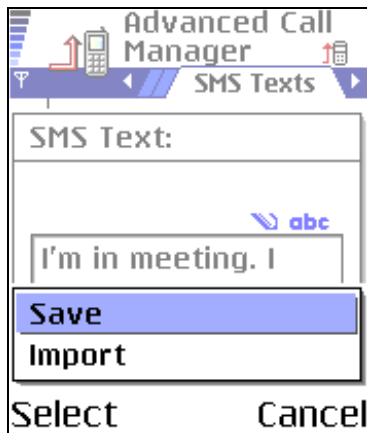

Voice Greetings

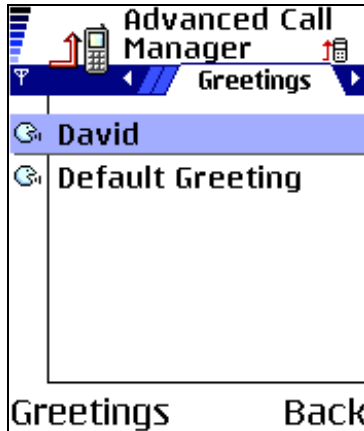


Here you can record a new voice greeting or play, rename and delete an existing voice greeting, which can be used for both default and custom "Answering Machine" action.

- **New**
Record new voice greeting.
- **Play**
Plays an existing voice greeting.
- **Rename**
Renames an existing voice greeting.
- **Delete**
Deletes an existing voice greeting.




Voice Messages

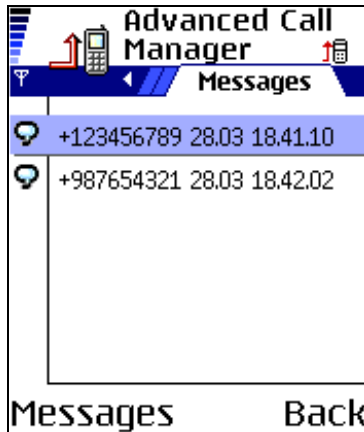

Here you can play, rename and delete recorded voice messages, when you are using "Answering Machine" action.

The default name format of the files is "Number" "Date" "Time".

- **Play**
Plays the selected voice message.
- **Rename**
Renames the selected voice message.
- **Delete**
Deletes the selected voice message.

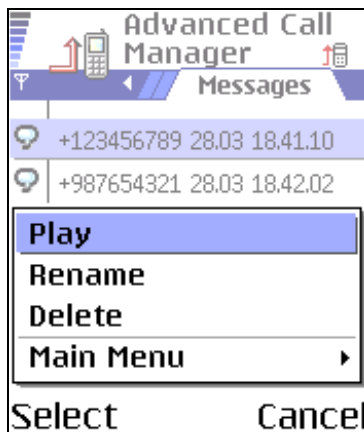

User scenarios

- **You want to accept all incoming calls.**
Switch to "Accept all calls (inactive)"
- **You are in meeting, but you are expecting important calls and want to transfer them to your secretary.**
Switch to "Reject all calls" and choose "Divert calls to..." action. Type your office phone number, when asked.
- **You don't want to accept incoming calls from custom people.**
Switch to "Reject from Black List" and choose the current black list. You can also choose various custom (per person) and default actions for the rejected calls.
- **You are in meeting, but you want to inform your wife that you will be home at 7 PM.**
Switch to "Reject all calls specific". Choose custom list which has defined your wife's phone number with custom action "Reply by SMS" and SMS text – "Honey, I'm in meeting. I'll be home at 7PM."
- **You want to accept incoming calls from selected people only.**
Switch to "Accept Phonebook" if you want to accept incoming calls from people listed in your phonebook only.
Switch to "Accept from white list" if you want to accept incoming calls from custom defined white list.